



SRB-E-201ST

- Plug-in screw terminals with coding
- STOP 0 Function
- 1 oder 2-channel control
- Start button / Auto-start
- 2 Safety outputs 5.5 A
- 1 Signalling output
- Monitoring two-hand control panels to EN ISO 13851

Data

Ordering code

Product type description	SRB-E-201ST
Article number (order number)	103008067
EAN (European Article Number)	4030661478456
eCl@ss number, version 12.0	27-37-18-19
eCl@ss number, version 11.0	27-37-18-19
eCl@ss number, version 9.0	27-37-18-19
ETIM number, version 7.0	EC001449
ETIM number, version 6.0	EC001449

Approvals - Standards

Certificates	cULus
	TÜV
	CCC

General data

Standards	EN IEC 60947-5-3
	EN IEC 60947-5-5
	EN IEC 60947-5-1
	EN IEC 61508

General data

	EN IEC 60204-1
	EN IEC 60947-1
	EN ISO 13849-1
	EN IEC 62061
Climatic stress	EN 60068-2-78
Housing material	Glass-fibre reinforced thermoplastic, ventilated
Gross weight	130 g

General data - Features

Electronic Fuse	Yes
Wire breakage detection	Yes
Cross-circuit detection	Yes
Removable Terminals	Yes
Start input	Yes
Feedback circuit	Yes
Automatic reset function	Yes
Reset edge detection	Yes
Earth connection detection	Yes
Integral system diagnostics, status	Yes
Integral system diagnostics, error code	Yes
Number of LEDs	5
Number of normally closed (NC)	2
Number of normally open (NO)	1
Number of safety digital outputs, Stop 0	2
Number of signalling outputs	1

Safety classification

Standards	EN IEC 61508
	EN ISO 13849-1
	EN IEC 62061
Stop-Category	0

Safety classification - Fail-safe digital outputs

Performance Level, up to	e
--------------------------	---

Safety classification - Fail-safe digital outputs

Category	4
PFH value	2.66×10^{-9} /h
PFD value	2.42×10^{-5}
Safety Integrity Level (SIL), suitable for applications in	3
Mission time	20 Year(s)

Mechanical data

Mounting	Snaps onto standard DIN rail to EN 60715
----------	--

Mechanical data - Connection technique

Terminal designations	IEC/EN 60947-1
Cable section, minimum	0.25 mm ²
Cable section, maximum	2.5 mm ²
Tightening torque of Clips	0.5 Nm
Allowed type of cable	solid single-wire
	flexible
Terminal (mechanical)	Removable screw terminals

Mechanical data - Dimensions

Width	22.5 mm
Height	98 mm
Depth	115 mm

Ambient conditions

IP Degree of protection of the enclosure	IP40
IP Degree of protection of the installation space	IP54
IP Degree of protection of clips or terminals	IP20
Ambient temperature	-25 ... +60 °C
Storage and transport temperature	-40 ... +85 °C
Note (Relative humidity)	non-condensing
Resistance to vibrations	10 ... 55 Hz, Amplitude 0.35 mm
Resistance to shock	30 g / 11 ms

Ambient conditions - Insulation values

Rated impulse withstand voltage Uimp	0.8 kV
Overvoltage category	III
Degree of pollution	2

Electrical data

Operating voltage	24 VDC -20 % / +20 %
Ripple voltage	10 %
Rated operating voltage	24 VDC
Operating current	100 mA
Rated AC voltage for controls at DC minimum	19.2 VDC
Rated control voltage at DC, maximum	28.8 VDC
Electrical power consumption	2.4 W
Drop-out delay in case of power failure, typically	10 ms
Drop-out delay in case of emergency, typically	10 ms
Pull-in delay at automatic start, maximum, typically	150 ms
Pull-in delay at RESET, typically	150 ms
Switching frequency, maximum	1 Hz

Electrical data - Safety digital outputs

Voltage drop Ud, maximum	0.5 V
Leakage current Ir, maximum	1 mA
Voltage, Utilisation category DC-12	24 VDC
Current, Utilisation category DC-12	5.5 A
Voltage, Utilisation category DC-13	24 VDC
Current, Utilisation category DC-13	3.5 A

Electrical data - Digital inputs

Conduction resistance, maximum	40 Ω
--------------------------------	-------------

Electrical data - Digital Output

Voltage, Utilisation category DC-12	24 VDC
Current, Utilisation category DC-12	0.1 A

Electrical data - Electromagnetic compatibility (EMC)

EMC rating	EMC-Directive
------------	---------------

EMC rating	EMC-Directive
------------	---------------

Status indication

Indicated operating states	Baustein-Status
	Internal operating voltage U _{li}

Indicated operating states	Baustein-Status
	Internal operating voltage U _{li}

Internal operating voltage U _I
Fault codes

Internal operating voltage U _I
Fault codes

Other data

Note (applications)	Safety light curtain
	Two-hand control panels

Note (applications)	Safety light curtain
	Two-hand control panels

Two-hand control panels
Pull-wire emergency stop switches

Emergency-Stop button


Safety sensor
hinged safety guard

Pictures

Product picture (catalogue individual photo)

Pictures

Product picture (catalogue individual photo)

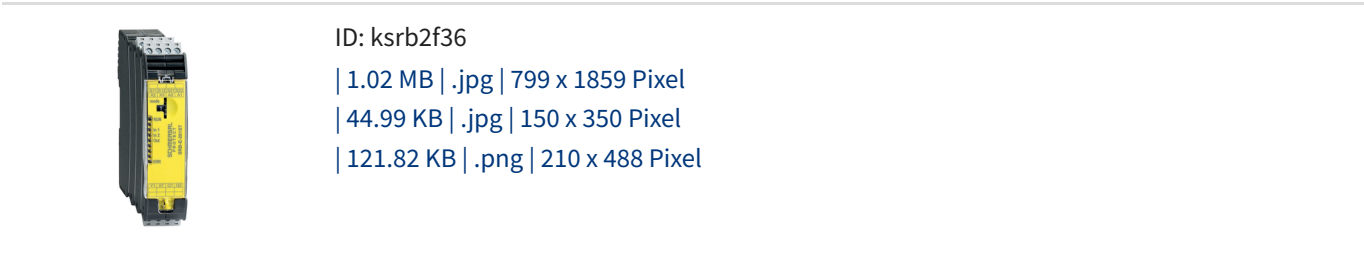


 ID: ksrb2f36
| 1.02 MB | [img](#) | 799 x 1859 Pixel

| 1.02 MB | .jpg | 755 x 1659 Pixel



Wiring example

Wiring example

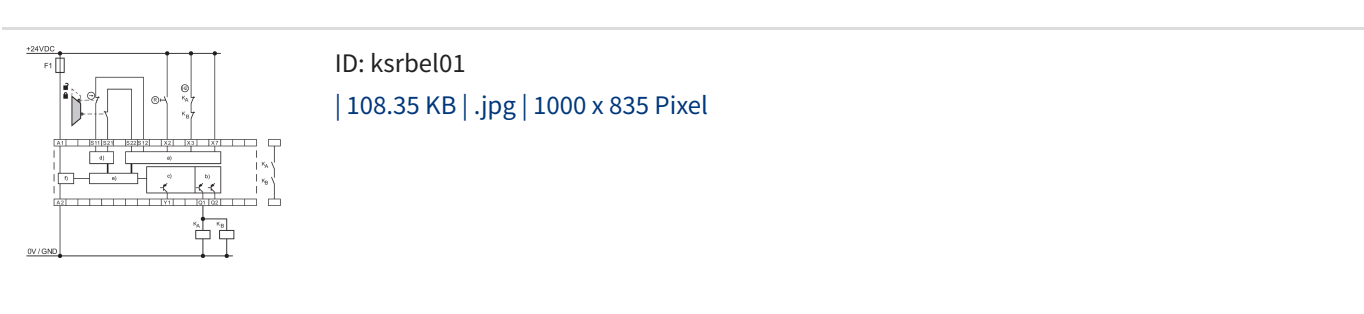


 ID: ksrbel01

108.35 KB | .jpg | 1000 x 835 Pixel

The details and data referred to have been carefully checked. Images may diverge from original. Further technical data can be found in the manual. Technical amendments and errors possible.

Generated on: 10/09/2026, 13:08